




# Methoxypropanol (PM)

Methoxypropanol is a semi-volatile solvent which, owing to its good dissolving capacity, can be used with many coating materials, e.g. for thinning or cleaning. It is watermiscible.

#### Characteristics

Colour/appearance	colourless, clear
Density at 20 °C [68 °F], DIN 51757	$0.920 \pm 0.005 \text{ g/cm}^3$
Refractive index n <sup>D</sup> <sub>20</sub> DIN 51423 at 20° C [68 °F]	1.403 ± 0.002

## Processing

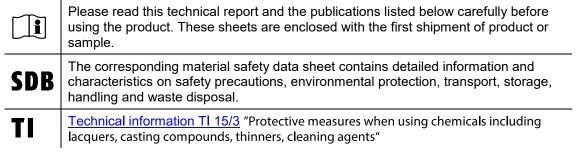

#### Safety recommendations

- When using chemicals, the common precautions should be carefully noted.
- Ensure that extractor units of workplace ventilation arrangements are positioned at solvent source level.
- Please also pay attention to national guidelines or directives concerning operating safety such as the German TRBS (technical rules for operating safety) and those concerning the handling of flammable liquids or European directives.

Methoxypropanol may react with oxgen to form peroxides.

### Packaging

The packing units available are indicated in our offer which we will send you upon request.

### Shelf life and storage conditions



Shelf life: In sealed original containers at least 24 months



Storage conditions: +5 °C to +25 °C [+41 °F to +77 °F]

For warehousing reasons, isolated cases may occur where the shelf life upon shipment is less than the shelf life indicated in this technical report. However, it is ensured that our products have **at least** two-thirds of their shelf life remaining when they leave our company. Labels on containers show shelf life and storage conditions.

#### Disclaimer

All descriptions and images of our goods and products contained in our technical literature, catalogues, flyers, circular letters, advertisements, price lists, websites, data sheets and brochures, and in particular the information given in this literature are non-binding unless expressly stated otherwise in the Agreement. This shall also include the property rights of third parties if applicable.

The products are exclusively intended for the applications indicated in the corresponding technical data sheets. The advisory service does not exempt you from performing your own assessments, in particular as regards their suitability for the applications intended. The application, use and processing of our products and of the products manufactured by you based on the advice given by our Application Technology Department are beyond our control and thus entirely your responsibility. The sale of our products is effected in accordance with our current terms of sale and delivery.

Any questions? We would be pleased to offer you advice and assistance in solving your problems. Samples and technical literature are available upon request.

peters
Coating Innovations
for Electronics

2 www.peters.de